



## SET AND FORGET - CHARGING



**Step 1 -** Connect the charger to a power point (do not plug your device yet) and select a mode that's suitable for your device.

The charger will remember the mode you have previously selected.

You can now plug and charge your device.



**Step 2 -** Download the app VictronConnect from PlayStore (Android) or Appstore (IOS)

**Step 3 -** Connect your phone with the charger by using bluetooth



Turn on the bluetooth on your mobile phone and find your charger on the device list.



Type the password: 000000 six zeros and press OK.

Now you have connected the charger with your mobile phone.






## DUAL SLA / LITHIUM CHARGERS USER GUIDE TE-CH5L / TE-CH8L / TE-CH13L




When charging, the charger goes through different stages:

- **Test mode:** runs a battery test and if the batteries are faulty the charger won't charge.
- **Bulk mode:** Battery is charging with maximum current until absorbtion voltage is reached. At the end of bulk charge battery is 80% charged and ready for use.
- **Absorption charge:** Battery is charging at constant voltage and with decreasing current until it is fully charged.
- Float mode: Keep battery at constant voltage and fully charged
- **Storage mode:** Keeps battery fully charged and there's no risk at all of damaging the battery or electricity hazards.

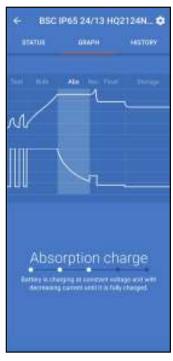

You can also see a Graph through the app

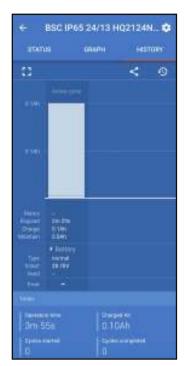

History section shows previous and active cycles alongside with general info about them such as: time, cycles started, cycles completed...



In settings you can change the charge preset and charge current for example 13A to 4A so it's safe to charge smaller unit.